ARRIVAL | KILLING AND PLUCKING | **EVISCERATION** | CHILLING | WEIGHING | CUT-UP | FILLETING & DEBONING | PACKINI

## **Automatic Inside/Outside Bird Washer**







## **Key Benefits**

- Driven by the overhead conveyor
- Thoroughly spray washing the birds both inside and outside
- · Wash units are equipped with spray pipes with a spiral high pressure nozzle
- · The water supply is controlled by a leakage free automatic control valve
- No water wastage
- Safety sensor which automatically halts the evisceration line upon detecting a machine jam or breakdown, preventing further damage to the line
- Made of stainless steel and other non-corrosive materials
- Supplied with doors, receiving bin with central drain
- Height adjustment device

ARRIVAL | KILLING AND PLUCKING | **Evisceration** | Chilling | Weighing | Cut-up | Filleting & Deboning | Packini

## **Automatic Inside/Outside Bird Washer**

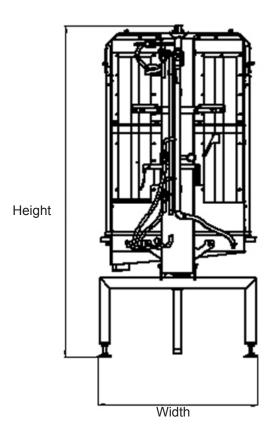

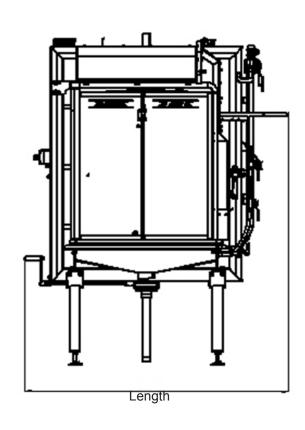

Technical details					
Model		BW7	BW14	BW15	BW20
Capacity	bph	3000	6000	6500	10000
Live weight*	g	900 - 3200	900 - 3200	900 - 3200	900 - 3200
Number of units	n	7	14	15	20
Shackle pitch	inch	12	6	8	6
Length	mm	1800	1800	2300	2300
Width	mm	1700	1700	1490	1490
Height	mm	1800	1800	2530	2530
Weight	kg	870	970	1150	1250
Water connection	BSP	3/4"	3/4"	3/4"	3/4"
Water consumption	liters per carcass	1	1	1	1
Drain connection	BSP	DN100	DN100	DN100	DN100
* may weight variance in one fleek in 1/ 150g in once of live weight 700, 1200 grams and 1/ 200g in once of live weight					

<sup>\*</sup> max weight variance in one flock is +/- 150g in case of live weight 700 - 1200 grams and +/- 300g in case of live weight 1200 - 1700 grams