ARRIVAL | KILLING AND PLUCKING | **Evisceration** | Chilling | Weighing | Cut-up | Filleting & Deboning | Packini

## **Automatic Neck Breaker/Slitter**







## **Key Benefits**

- Driven by the overhead conveyor
- Simple construction
- A uniform neck breaking is provided by the double sliding blocks
- Safety sensor which automatically halts the evisceration line upon detecting a machine jam or breakdown, preventing further damage to the line
- Made of stainless steel and other non-corrosive materials
- Supplied with receiving bin with central drain
- Height adjustment device

ARRIVAL | KILLING AND PLUCKING | **Evisceration** | Chilling | Weighing | Cut-up | Filleting & Deboning | Packini

## **Automatic Neck Breaker/Slitter**

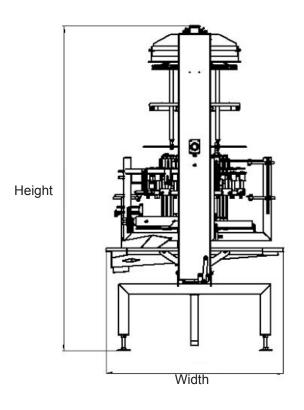

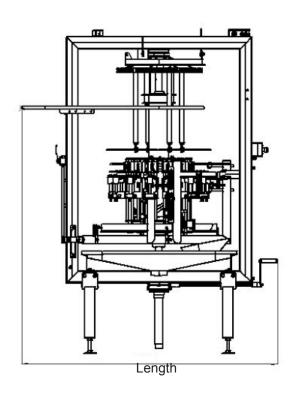

Technical details					I
Model		NB7	NB14	NB15	NB20
Capacity	bph	3000	6000	6500	10000
Live weight*	g	900 - 3200	900 - 3200	900 - 3200	900 - 3200
Number of units	n	7	14	15	20
Shackle pitch	inch	12	6	8	6
Length	mm	2020	2020	2360	2360
Width	mm	1395	1395	1640	1640
Height	mm	2560	2560	2560	2560
Weight	kg	750	850	950	1050
Water connection	BSP	1/2"	1/2"	1/2"	1/2"
Water usage	m3/h	0.5	0.5	0.5	0.5

<sup>\*</sup> max weight variance in one flock is +/- 150g in case of live weight 700 - 1200 grams and +/- 300g in case of live weight 1200 - 1700 grams