



pluck & play solutions.

ARRIVAL | KILLING AND PLUCKING | **EVisCERATION** | CHILLING | WEIGHING | CUT-UP | FILLETING & DEBONING | PACKING

Automatic Opener



Key Benefits



- Driven by the overhead conveyor
- Ball shaped opening device is placed in the vent hole
- Device will open by a guide track
- Small knives placed in the units ensure a straight cut
- Intestines are pressed downwards during the shearing movement to avoid damage
- No cross contamination
- Made of stainless steel and other non-corrosive materials
- Supplied with receiving bin with central drain
- Safety sensor which automatically halts the evisceration line upon detecting a machine jam or breakdown, preventing further damage to the line
- Height adjustment device



pluck & play solutions.

ARRIVAL | KILLING AND PLUCKING | **EVISCERATION** | CHILLING | WEIGHING | CUT-UP | FILLETING & DEBONING | PACKING

Automatic Opener

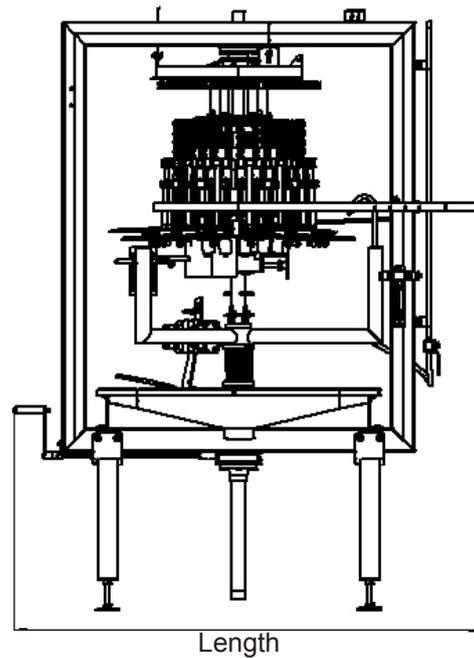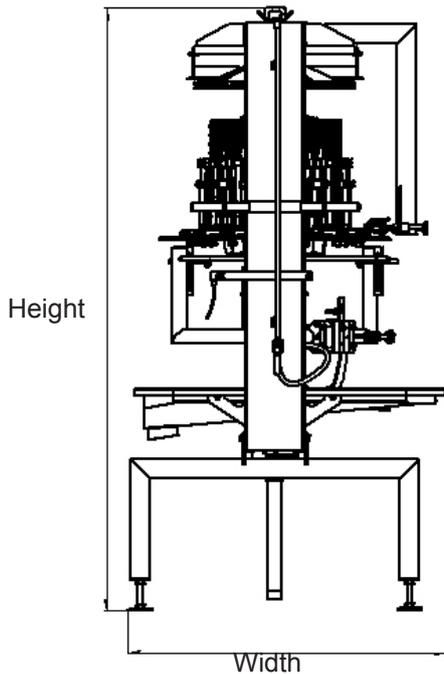

Technical details

Model		OP7	OP14	OP15	OP20
Capacity	bph	3000	6000	6500	10000
Live weight*	g	900 - 3200	900 - 3200	900 - 3200	900 - 3200
Number of units	n	7	14	15	20
Shackle pitch	inch	12	6	8	6
Length	mm	1940	1940	1550	1550
Width	mm	1300	1320	2260	2260
Height	mm	2550	2520	2520	2520
Weight	kg	280	320	350	500
Water connection	BSP	1/2"	1/2"	1/2"	1/2"
Water usage	m3/h	0.5	0.5	0.5	0.5

* max weight variance in one flock is +/- 150g in case of live weight 700 - 1200 grams and +/- 300g in case of live weight 1200 - 1700 grams